


The Very Best Equipment for the **Lowest Cost of Ownership.**

### PROGRAMMED SIMPLICITY:

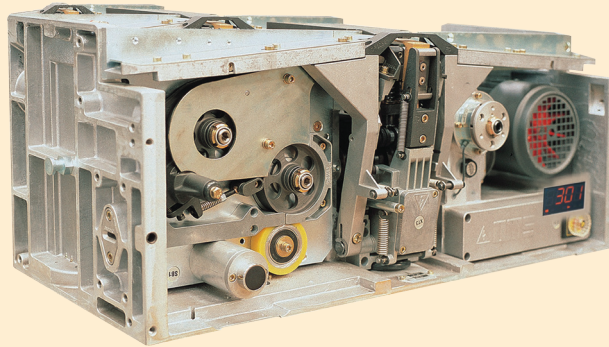

#### Non-Lubricated Strap

- Less expensive strapping

#### Superior Seals

- Digital Thermo couple
- Stronger than friction weld seals

#### Reduced Maintenance

- Rapid disconnect
- Long lasting strap cutting blades
- New welding blade design

#### Hardened Steel Parts

- Lasts up to 3x Longer

#### Four Models

- For all applications

#### OMS World Wide Presence

- 2nd largest manufacturer of large strapping systems

TECHNICAL SPECIFICATIONS	TR14	TR14HD	TR18	TR19HT
Strap Type	PP-PET	PP-PET	PET	PET
Strap Width	from .37" to .62"		from .50" to .75"	from .50" to .75"
Strap Thickness	from .019" to .030"		from .030" to .050"	from .030" to .050"
Maximum Pack Tensioning	400 lbs.		900 lbs.	1500 lbs.
Continuous Use Tensioning	200 lbs.	400 lbs.	600 lbs.	1500 lbs.
Utilization Temperature	32° - 120° F			
Noise Level	70 Db			

**Equipment + Strap + Parts + Service = Total Cost**

Polychem provides the **Lowest Cost of Ownership**

*Polychem has chosen OMS's internationally patented TR Model strapping head based on their exceptional durability. The TR strapping head has evolved and has been proven in the most demanding environments. Four versions of the TR Model strapping head are available to meet your strapping needs.*