

**Textiles
and
Fibers**

POLYCHEM[®]
PLASTIC STRAPPING SYSTEMS

POLYESTER STRAPPING



TEXTILE & FIBER BALING



Textile and Fiber Baling

Two Kinds of Fiber:

- Natural-cotton, wool, etc.
- Synthetic-polyester, nylon, etc.

Application:

Fiber is compressed, strapped during compression and handled as a bale.




Typical Synthetic Bale:

- Weighs between 600 and 900 lbs.
- Six or seven straps per bale.
- Bales are wrapped with material or film.

Primarily automatic heads are fixed to baler and apply straps one or two at a time, indexing across length of bale. Rebound, not applied tension, determines tension on straps.

Approximately 70' of strap is used per bale.

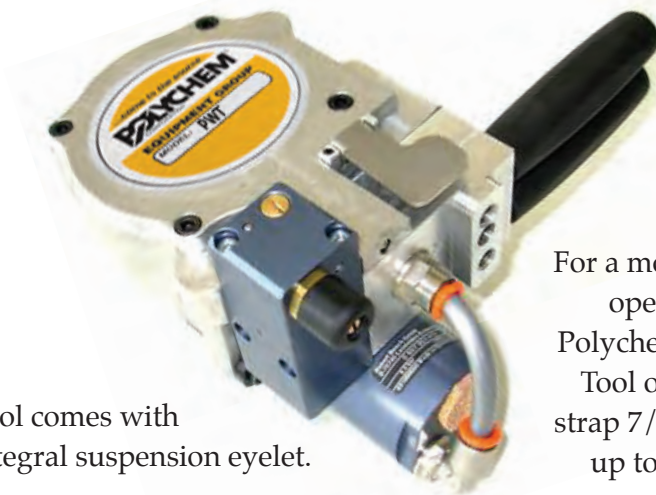

Tool comes with integral suspension eyelet.

PWT

For a more economical operation, use Polychem's PWT tool. Tool operates with strap 7/16" - 3/4" and up to .055" thick.

Polychem Product	Size	Break Strength	Coils per Pallet	Closure Method
MPC 2042	5/8" x .042 x 4,000'	1,600 lbs.	28	Friction Sealed
MPV 2042	5/8" x .042 x 11,000'	1,600 lbs.	4	Friction Sealed
MPC 2041	5/8" x .040 x 4,000'	1,400 lbs.	28	Friction Sealed
MPV 2041	5/8" x .040 x 11,000'	1,400 lbs.	4	Friction Sealed
MPC 2033	5/8" x .035 x 4,000'	1,400 lbs.	28	Friction Sealed
MPC 2030	5/8" x .030 x 4,600'	1,100 lbs.	28	Friction Sealed
MP3455	3/4" x .055 x 6,700'	2,600 lbs.	6	Friction Sealed
MP3460	3/4" x .060 x 6,600'	2,800 lbs.	5	Friction Sealed

NOTICE: The strap is not designed to be used as a handle or other means of moving the finished bale.



6277 HEISLEY ROAD
MENTOR, OHIO 44060
(440) 357-1500
FAX (440) 352-9553

WEST COAST DISTRIBUTION CENTER
11920 ALTAMAR PLACE
SANTA FE SPRINGS, CA 90670
(562) 903-4579
FAX (562) 903-4579
1-800-899-0822

POLYCHEM OMS SYSTEMS
6277 HEISLEY ROAD
MENTOR, OHIO 44060
(440) 357-1500
FAX (440) 352-9553



CALL TOLL FREE 1-888-POLYCHEM
www.polychem.com

or 1-888-765-9243