



PC2000CX

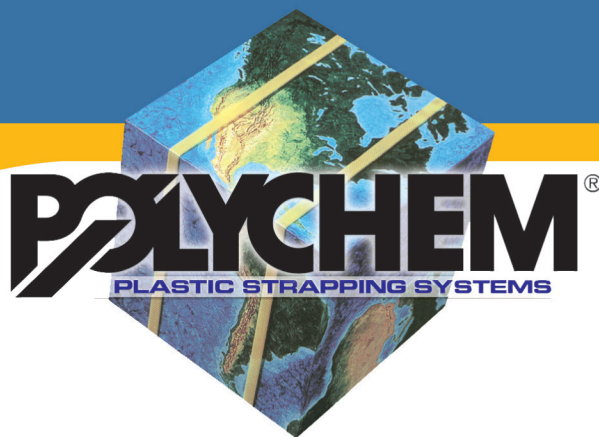

AUTOMATIC STRAPPING MACHINE

*Up to
65
Straps
per minute*

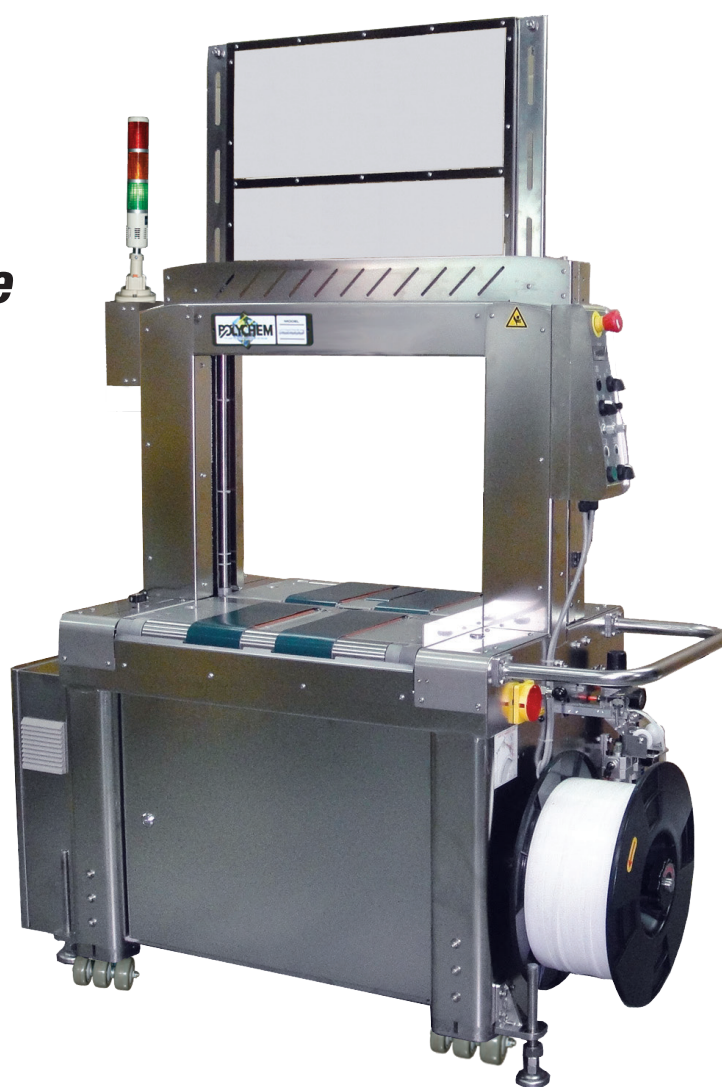

304
STAINLESS STEEL
FOR HARSH
ENVIRONMENTS



- **For the Protein Markets (Poultry-Fish-Meat)**
- **Dual Cylinder Pneumatic Press**
- **Variable Speed Belt Conveyor**



PC2000CX Automatic Strapping Machine




Testimonial

"Having dealt with every strapping machine out there the PC2000CX has the highest throughput, least maintenance and is more versatile than any we have ran. The PC2000CX's ability to run smooth or embossed in a wide range of thicknesses and widths allows easy transition to fit our customer's needs." ~Polychem Distributor

Benefits

- **Increase Throughput** - Up to 65 Straps per Minute
- **Reduced Maintenance Costs** - Fewer Parts/ DC Brushless Motors
- **Experience Less Downtime** - Extra Long Length Coils
- **Enjoy Quick & Easy Mobility** - Triple Wide Casters

Dimensions

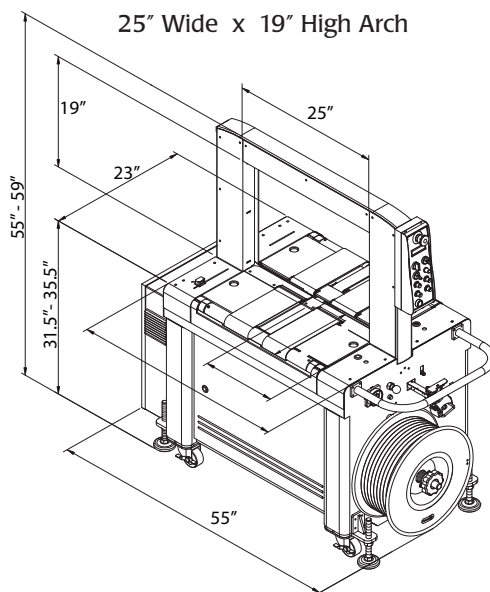

Standard

- **Robust and Compact Strapping Head**
- **Standard arch size – 25" w x 19" h**
- **Free Access to Strap Guides (patents registered)**
- **Electronic Tension Control/Auto Strap Ejector**
- **Dual Photo Eyes/Siemens PLC Control**
- **Hinged Top Plates (7 gauge)/Splash Guard Over Seal Head**
- **Dual cylinder pneumatic press for agility and finely tuned package compression**
- **Pneumatic air gun for easy maintenance cleaning**
- **Extra wide HD locking casters to handle quick movements in and out of station**
- **Fixed strap cutter near strap coil for convenience**
- **Multiple strap function for single, double, continuous strapping or transit mode**
- **Belt-driven table with variable conveyor speed between 32 and 195 feet/min**
- **Up and down stream interlock with complete plug connection**
- **Loop Ejector**

Options

- **Easy reversible package flow**
- **Operator friendly low strap sensor (triple lamp)**
- **Extension belt-driven table of 8 inches on upstream and downstream side**
- **Lower adjustable table 35.5 inches**
- **Max. tension up to 115 lbs (for 9 mm)**
- **Additional internal parts available in 304 stainless**
- **Energy saving transit with auto sleep mode**

Specifications

Cycle Rate:	Up to 65 straps per minute depending on arch and package size
Package Weight:	Up to 100 lbs.
Strap Tension:	Up to 115 lbs
Polypropylene Strap:	5mm, 6mm, 9mm, 3/8, 12mm, 1/2
Electrical Requirements:	110V 60Hz 1 Phase
Shipping Weight:	450 lbs.



CALL TOLL FREE 1-800-548-9557
www.polychem.com

6277 HEISLEY ROAD
 MENTOR, OHIO 44060
 (440) 357-1500
 FAX (440) 352-9553

WEST COAST DISTRIBUTION CENTER
 11920 ALTAMAR PLACE
 SANTA FE SPRINGS, CA 90670
 (562) 903-4576
 FAX (562) 903-4579
 1-800-899-0822

