

NEWS YOU CAN USE

Volume 15, Issue 1 / June 2017



Premier Packaging Event...September 25-27, 2017

POLYCHEM BOOTH #S6338 -LAS VEGAS CONVENTION CENTER

It is our pleasure to provide our customers COMPLIMENTARY REGISTRATION

Visit www.packexpolasvegas.com and select "REGISTER"

VIP: When using the Free Registration Code (21R19) be sure to type this code in the box labeled "comp code" during the registration process, and your registration fee will be waived.



- DC Brushless Motors
- Strap Guide Holds Strap in Place

Cycles

- QR Coded for Quick Access to Manual
- Comes with 2 Batteries and a Charger

Weight

B2000 BATTERY TOOL SPECIFICATIONS Polyester (PET) Max Tension 2000 lbs Strap Type Strap Width 1 inch and 1 1/4 inch Speed 4 inches / sec 25mm and 32mm 100 mm / sec 5.9 inches 0.031 inches Width Min Thickness Max Thickness 0.055 inches Height 6.3 inches 36V2.0 Ah Li-lon 15.7 inches Battery Length

AAR approved 1 inch and 1 ¼ inch Polyester Strapping are available in .040 and .050 thicknesses.

Up to 200

BATTERY TOOL

APPLICATIONS FOR THE POLYCHEM B2000










13.8 lbs

A PUBLIC SERVICE ANNOUNCEMENT FROM POLYCHEM®



The Steel Strapping Habit

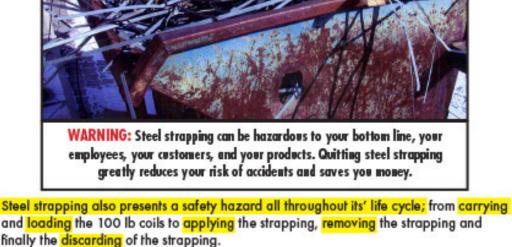

manufacturers to raise steel strap pricing across the board. NOW MORE THAN EVER, IT'S TIME TO KICK THE HABIT... THE STEEL STRAPPING HABIT MORE INFO

In addition to steel strapping being a safety hazard, the cost of steel is on the rise with

the US levying new and larger tariffs on imported steel allowing for domestic

"SHIPABILI"

Sometimes it takes a brand new word to describe the concept...



POLYCHEM:

Celebrating Over 40 Years in Business

Secure Your Future®

POLYCHEM Companies





West Coast: 1-800-899-0822

© 2017 Polychem Corporation. All rights reserved. 6277 Heisley Road Mentor, Ohio 44060

Toll Free: 1-800-548-9557 (440) 357-1500 Fax (440) 352-9553